




- ▶ Connection: Flanged to EN 1074-3, BS EN12334.
- ▶ Working Pressure: PN10/ PN16.
- ▶ Temperature range: 0°C – 80°C.
- ▶ Internal and external coating by fusion bonded epoxy powder 250 micron thickness.

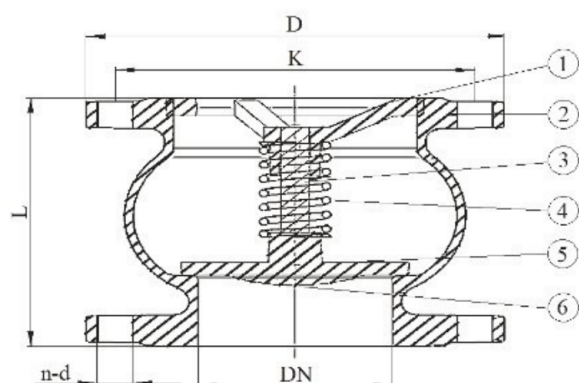

Parts

Item	Part name	Material
1	Ring	GGG50
2	Body	GGG50
3	Stem	Brass
4	Spring	SS304
5	Seat	GGG50
6	Seat Cover	EPDM

Dimensions

Unit:mm

Size		Flange dimension PN10/PN16			
DN	inch	L	D	K	n-d
DN50	2"	120	125	125	4-φ19
DN65	2.5"	130	146	145	4-φ19
DN80	3"	150	160	160	8-φ19
DN100	4"	162	180	180	8-φ19
DN125	5"	190	210	210	8-φ19
DN150	6"	208	240	240	8-φ19
DN200	8"	255	295	295/295	8-φ19
DN250	10"	280	350	350/355	12-φ19
DN300	12"	310	400	400/410	12-φ19