


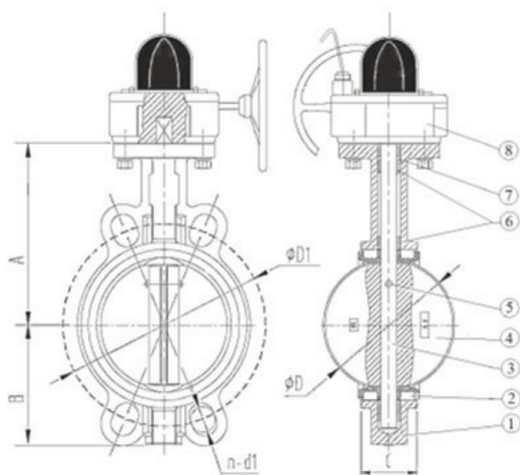

- ▶ Connection: Flanged to ISO 5211, BS 5155.
- ▶ Working Pressure: PN10/ PN16.
- ▶ Temperature range: 0°C – 80°C.
- ▶ Internal and external coating by fusion bonded epoxy powder 250 micron thickness.

Parts

Item	Part name	Material
1	Body	GGG50
2	Seat	EPDM
3	Shaft	SS420
4	Disc	Ductile Iron
5	Pin	SS304
6	Bushing	PTFE
7	O-Ring	EPDM
8	Wormgear	Components
9	Signal Switch	---

Dimensions

Unit:mm

Size		A	B	C	φD	φD1	n - d1
DN	inch						
DN50	2"	127	64.5	42	52.6	125	4-φ19
DN65	2.5"	138.3	76.2	44.7	64.5	145	4-φ19
DN80	3"	146.3	92	45.2	78.8	160	8-φ19
DN100	4"	162.5	106.5	52.1	104	180	8-φ19
DN125	5"	117.9	118.5	54.4	123.3	210	8-φ19
DN150	6"	194.6	133.4	55.8	155.6	240	8-φ23
DN200	8"	240.6	167.4	60.6	202.5	295	8-φ23/12-φ23
DN250	10"	263.8	204.2	65.6	250.5	350/355	12-φ23/12-φ28
DN300	12"	301.7	240.3	76.9	301.6	400/410	12-φ23/12-φ28